





### 特點 Features

- 可靠的連接，極佳的抗振動和耐衝擊性
- 雙曲面網狀結構，接觸面積大，可提高電流承載能力
- 較小的接觸阻抗，較低的溫升
- 插拔過程自我潔淨功能
- 可實現0.66mm極小插孔尺寸生產
- 高達10,000次插拔壽命
- High reliability under vibration and shock
- Hyperbolic Lamella construction for more contact surface area with higher current carrying capabilities
- Lower contact resistance, lower temperature rise
- Self-cleaning/wiping contact action and the lower contact insertion force
- Making the production of socket sizes as small as 0.66mm possible
- Up to 10,000 mating/unmating cycles

### TGA Close Up Type

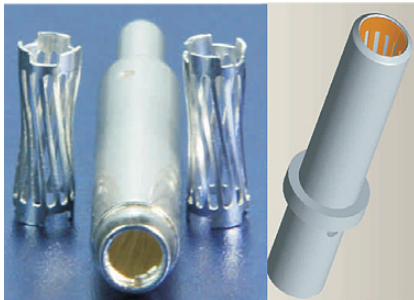

### TGA插孔編號與規格 TGA Netsok P/N & Specification

插孔編號 Netsok P/N	插孔尺寸 Netsok Size ØB	耐電流 (80°C) Current Rating	長度 A Length (mm)		插拔力 Mating Force (Kg)	
			標準型 Standard	經濟型 Short Type	拔出 Extract	插入 Insert
<b>TGA007</b>	0.66mm (#23)	3A	4.0	-	0.2	1.5
<b>TGA008</b>	0.76mm (#22)	5A	4.0	-	0.2	1.5
<b>TGA010</b>	1.02mm (#20)	7.5A	6.0	-	0.3	3.0
<b>TGA015</b>	1.50mm	25A	6.0	-	1.0	4.5
<b>TGA016</b>	1.57mm (#16)	25A	6.0	-	1.0	4.5
<b>TGA024</b>	2.39mm (#12)	35A	8.0	6.0	1.5	9.0
<b>TGA030</b>	3.0mm	45A	10.0	-	2.0	10.5
<b>TGA032</b>	3.2mm	50A	10.0	8.0	2.0	10.5
<b>TGA036</b>	3.61mm (#8)	70A	10.0	-	4.0	15.0
<b>TGA040</b>	4.0mm	75A	10.0	8.0	4.0	18.0
<b>TGA057</b>	5.72mm (#4)	100A	13.5	-	5.0	22.5
<b>TGA060</b>	6.0mm	120A	20.0	14.0	5.0	27.0
<b>TGA080</b>	8.0mm	200A	20.0	16.0	10.0	45.0
<b>TGA091</b>	9.1mm (#1/0)	250A	20.0	16.0	10.0	45.0
<b>TGA100</b>	10.0mm	270A	25.0	18.0	15.0	52.5
<b>TGA103</b>	10.3mm (#2/0)	300A	25.0	18.0	15.0	52.5
<b>TGA120</b>	12.0mm	350A	25.0	18.0	15.0	52.5
<b>TGA140</b>	14.0mm	500A	33.0	25.0	25.0	67.5
<b>TGA160</b>	16.0mm0	600A	30.0	25.0	25.0	75.0